

Geomagnetic Reference Models

Élément introductif — Élément central — Élément complémentaire

Warning

This document is not an ISO International Standard. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an International Standard.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Not Official Standard
For Review Only

Table of Contents

Foreword	v
Introduction.....	vi
1 Scope	1
2 Reference frames	1
2.1 Geocentric reference frame.....	2
2.2 Geodetic reference frame	2
2.3 Geodetic to geocentric coordinate transform	3
3 Specification of the geomagnetic field vector.....	3
3.1 Magnetic vector components in the geocentric frame.....	3
3.2 Magnetic elements in the geodetic reference frame.....	4
3.3 Transform of magnetic vector components from geocentric to geodetic frame.....	6
4 Specification of the geomagnetic reference model	6
4.1 Potential of the magnetic field	6
4.2 Geomagnetic reference radius.....	7
4.3 Epoch of a sub-model.....	7
4.4 Validity of a submodel	7
4.5 Time-dependence of Gauss coefficients	8
4.6 Calculation of magnetic vector components in the geocentric reference frame	8
4.7 Spatial wavelength	10
4.8 Root-mean-square difference between two model fields.....	10
5 Examples of the use of geomagnetic reference models.....	11
5.1 Compute reference magnetic elements near the Earth's surface.....	11
5.2 Compute reference magnetic vector in near-Earth space	11
5.3 Compute reference magnetic vector in magnetosphere.....	12
Annex (Informative).....	13
1 International Geomagnetic Reference Field	13
1.1 Model web site	13
1.2 Stand-alone software	13
1.3 Online calculators	13
1.3.1 Declination, single point.....	13
1.3.2 Magnetic vector and elements, single point.....	13
1.3.3 Magnetic vector and elements, grids and profiles.....	13
1.4 Charts of the magnetic elements.....	13
2 World Magnetic Model	14
2.1 Model web site	14
2.2 Stand-alone software	14
2.3 Online calculators	14
2.4 Charts and shape files of the magnetic elements.....	14
2.5 WMM technical report	14
2.6 User support	14
3 British Geological Survey Global Geomagnetic Model.....	15
3.1 Model web site	15
3.2 Software	15
3.3 User support	15
4 Enhanced Magnetic Model	15
4.1 Model web site	15
4.2 Stand-alone software	15
4.3 User support	15
5 High Definition Geomagnetic Model.....	15
5.1 Model web site	16
5.2 Stand-alone software	16

5.3 User support.....16

Glossary of acronyms16

Not Official Standard
For Review Only

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

Draft Guides adopted by the responsible Committee or Group are circulated to the member bodies for voting. Publication as a Guide requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

This ISO Guide was prepared by Technical Committee ISO/TC 20, Aircraft and space vehicles, Subcommittee 14, Space systems and operations.

Not Official Standard
For Review Only

Introduction

For centuries, geomagnetic reference models have been used to describe the vector field (for example by its direction and strength) as a function of position and date. Such models are widely used in upper-atmospheric, ionospheric and magnetospheric research, and in characterizing the near-Earth space environment. They further provide an essential reference for navigation, heading and attitude determination and control subsystems of spacecraft and ground based systems.

Earth's magnetic field is represented in such models as a spherical harmonic expansion of the equivalent scalar magnetic potential. This representation was proposed by Karl Friedrich Gauss (1777-1855) and has been used ever since to describe the geomagnetic field. The spherical harmonic coefficients of the geomagnetic field are commonly called 'Gauss coefficients'. In 1969 the International Association for Geomagnetism and Aeronomy (IAGA) introduced the International Geomagnetic Reference Field (IGRF) which uses the Gauss representation to describe Earth's magnetic field. This International Standard closely mirrors the established specification of such models, including equations and computational procedure.

There are several internal and external sources contributing to the observed magnetic field. All of these sources affect a scientific or navigational instrument, but only some of them are represented in geomagnetic reference models. The strongest contribution, by far, is the magnetic field produced by motions in the Earth's liquid-iron outer core; this is called the core field. This core field changes perceptibly from year to year. When extrapolating the temporal evolution of the field into the future, a linear extrapolation of the Gauss coefficients is used. Geomagnetic reference models specify the Gauss coefficients for a start date (epoch) and provide their linear change over time as a set of so-called secular variation (SV) coefficients. Due to unpredictable non-linear changes in the core field, predictive geomagnetic reference models are valid only for a limited period, and users subsequently have to update to a newer version.

Other sources also contribute to the magnetic field: Magnetic minerals in the crust and upper mantle give rise to magnetic anomalies which can be significant locally. Electric currents induced by the flow of conducting sea water through the ambient magnetic field make a further, albeit weak, contribution to the observed magnetic field. Time-varying electric currents in the upper atmosphere and near-Earth space generate an external magnetic field. The external field does not average to zero over time. Its steady contribution can therefore be included in a geomagnetic reference model using external Gauss coefficients with linear secular variation. Time varying external magnetic fields further induce electric currents in the Earth and oceans, producing secondary internal magnetic fields. Since there is no general consensus on how to separate these various internal and external sources, it is left to the producer of a geomagnetic reference model to specify which of these internal and external sources are included in their model, and any radial limitation to the validity of the external part of their model.

Geomagnetic Reference Models

1 Scope


This International Standard defines reference models representing the geomagnetic field. It closely mirrors and clarifies specifications which have been in use for many decades.

The approach is to represent the corresponding scalar magnetic potential by a spherical harmonic expansion having specified numerical coefficients, called Gauss coefficients. This Standard covers models in which, at any one time, changes of the magnetic field are modelled by a linear time-dependence of each Gauss coefficient. A model might consist of a succession of sub-models, in each of which the coefficients change linearly with time. For such a step-wise linear model, the coefficients are continuous in time.. This document provides the equations and a step-by-step computational procedure to evaluate a geomagnetic reference model for any desired location and date.

Not specified in this standard is the interpretation of the geophysical content of a geomagnetic reference model. It is left to the producer of a model to specify which internal and external magnetic sources are included in (or excluded from) their model.

2 Reference frames

For positions remote from the Earth it is customary to use a geocentric reference frame, and to resolve the magnetic field vector into components based on this geocentric frame. For positions on and near the Earth's surface it is customary to use a geodetic reference frame, based on the standard WGS84 ellipsoid of rotation approximating the Earth's surface, and to resolve the magnetic field vector into components based on this geodetic frame. Note that the down axis in the geodetic frame is perpendicular to the surface of the WGS84 ellipsoid. Deflections of the vertical caused by local gravity anomalies have to be taken care of by the user and are not covered by this standard (see Section 0). Geocentric and geodetic coordinates are illustrated in Figure 1.

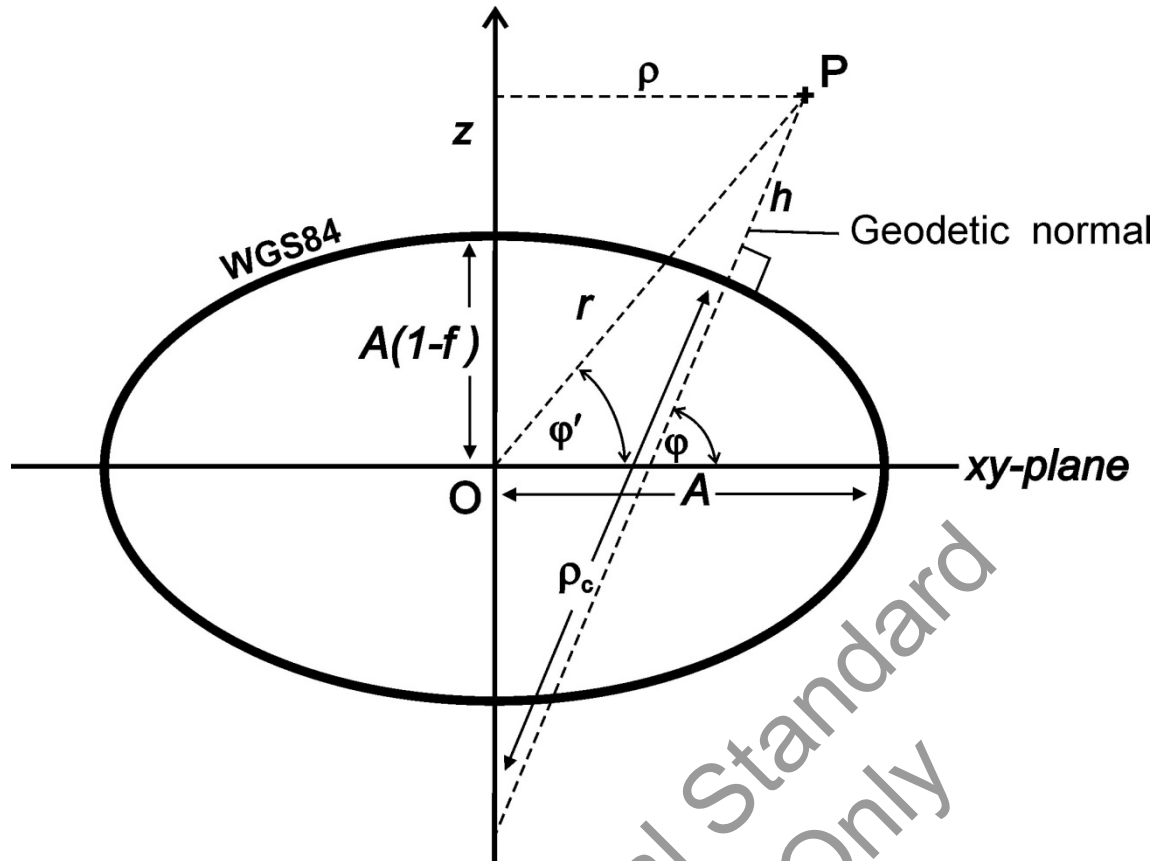

An axial cross-section through the point of interest P which is at longitude λ . This point P is specified in geocentric spherical polar coordinates by its distance r from the Earth center O and the incidence angle of the OP line with the equatorial xy-plane. The same point P has geodetic coordinates given by its height h above the WGS84 reference ellipsoid and the incidence angle of its geodetic normal with the xy-plane.

Figure 1: Geocentric and geodetic coordinates

2.1 Geocentric reference frame

A point location in geocentric Cartesian coordinates is given by the same (x, y, z) as are used in geodetic Cartesian coordinates – see Section 3.1.2 (but note that ISO 19111 uses capital X, Y, and Z). Equivalently, coordinates can be specified as geocentric spherical polar (λ, φ', r) , where λ is longitude, φ' is geocentric latitude, and r is distance from the Earth center. The prime is used to distinguish geocentric from geodetic terms where necessary.

2.2 Geodetic reference frame

The geodetic reference frame is based on the WGS 84 reference ellipsoid. This is an ellipsoid of rotation having a defined semi-major axis A (in the equatorial plane), and a flattening f . This leads to a semi-minor axis (essentially along the spin axis) of $A(1-f)$. Specifically

$$A = 6378137 \text{ m}$$

$$\frac{1}{f} = 298.257223563 \quad (1)$$

$$e^2 = f(2 - f)$$

where e is the (first) eccentricity.

A point location in geodetic coordinates is given by (λ, φ, h) , where λ is longitude, φ is geodetic latitude, and h is the height (distance normal to the ellipsoid) above the WGS 84 reference ellipsoid. Geodetic and geocentric longitudes are identical. This nomenclature follows ISO 19111. A point location can also be specified by the Cartesian coordinates (x, y, z) in the WGS84 reference system, where the positive z and x axes point in the directions of the semi-minor axis and the prime meridian ($\lambda=0$) in the equatorial plane, respectively; this is the same as the geocentric Cartesian coordinate system. For the WGS 84 ellipsoid we then have for ρ_c , the radius of curvature of the normal section at the geodetic latitude φ ,

$$\rho_c = \frac{A}{\sqrt{1 - e^2 \sin^2 \varphi}} \quad (2)$$

2.3 Geodetic to geocentric coordinate transform

The geodetic coordinates (λ, φ, h) are transformed into spherical geocentric coordinates (λ, φ', r) by recognizing that λ is the same in both coordinate systems, and that (φ', r) is computed from (φ, h) according to the equations:

$$\begin{aligned} x &= (\rho_c + h) \cos \varphi \cos \lambda \\ y &= (\rho_c + h) \cos \varphi \sin \lambda \\ z &= (\rho_c (1 - e^2) + h) \sin \varphi \\ \rho &= \sqrt{(x^2 + y^2)} = (\rho_c + h) \cos \varphi \\ r &= \sqrt{\rho^2 + z^2} \\ \varphi' &= \arcsin \frac{z}{r} \end{aligned} \quad (3)$$


Here, ρ is the east-west (cylindrical) radius of curvature.

3 Specification of the geomagnetic field vector

When synthesizing the field from the Gauss coefficients, the output field is given in a geocentric frame. But the output field is often needed in the geodetic frame, instead. This Section therefore specifies and relates the magnetic field in the geocentric and geodetic frames.

3.1 Magnetic vector components in the geocentric frame

At the point of interest $P(\lambda, \varphi', r)$, the geomagnetic field vector \mathbf{B} can be described by 3 orthogonal components in a local Cartesian coordinate system with origin at P and axes in the geocentric spherical-polar directions given by $d\lambda$, $d\varphi'$ and dr . For historical reasons, however, the triplet (X', Y', Z') is used (Fig. 2), where X' is the northerly intensity, Y' the easterly intensity, and Z' the inward radial intensity, positive towards the Earth's center. The unit vectors of the geomagnetic field components X' , Y' , and Z' thus point in the φ' , λ , and negative- r directions, respectively. The quantities X' , Y' , and Z' are the sizes of perpendicular vectors that add vectorially to \mathbf{B} . Note that the orientation of this coordinate system varies with angular position. The synthesis of the field from a spherical harmonic model initially produces these X' , Y' , and Z' components.

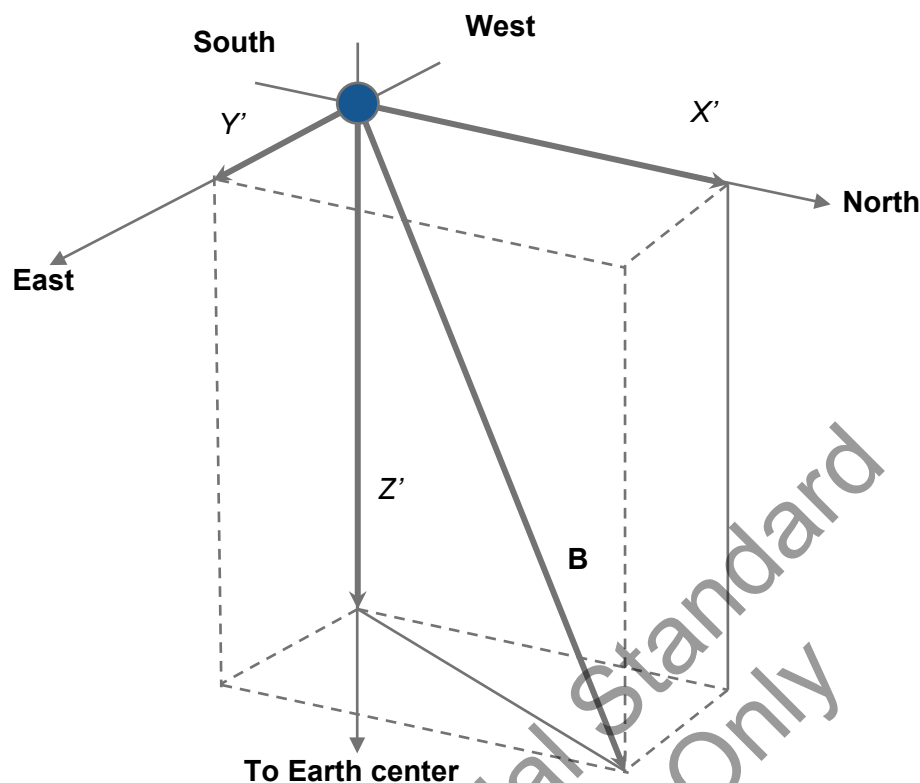


The components of the geomagnetic field vector \mathbf{B} in the geocentric reference frame are the northerly intensity X' , easterly intensity Y' and centerward intensity Z'

Figure 2: Components of the geomagnetic field vector in the geocentric reference frame

3.2 Magnetic elements in the geodetic reference frame

The geomagnetic field vector, \mathbf{B} , is fully described by an appropriate set of three elements, but in practice 7 elements are variously used (see Fig. 3). The main orthogonal set is the northerly intensity X , the easterly intensity Y , and the vertical intensity Z (positive downwards). Another orthogonal set is the total intensity F , the inclination angle I , (also called the dip angle and measured from the horizontal plane to the field vector, positive downwards), and the declination angle D (also called the magnetic variation and measured clockwise from true north to the horizontal component of the field vector). The seventh element is the horizontal intensity H . In the descriptions of X , Y , Z , F , H , I and D above, the vertical direction is perpendicular to the World Geodetic System (WGS84) ellipsoid model of the Earth's surface, the horizontal plane is perpendicular to the vertical direction, and the rotational directions clockwise and counter-clockwise are determined by a view from above.

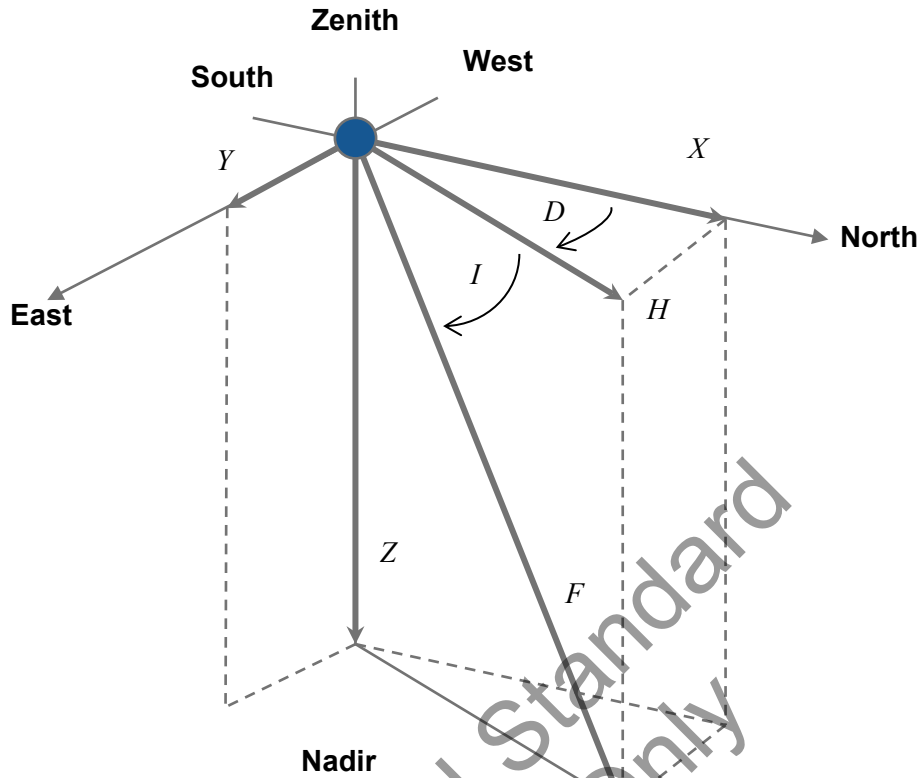

The 7 elements of the geomagnetic field vector **B** in the geodetic reference frame are: northerly intensity *X*, easterly intensity *Y*, vertical intensity *Z* (positive downwards), total intensity *F*, inclination angle *I*, (also called the dip angle and measured from the horizontal plane to the field vector, positive downwards), declination angle *D* (also called the magnetic variation and measured clockwise from true north to the horizontal component of the field vector), and horizontal intensity *H*.

Figure 3: Elements of the geomagnetic field vector in the geodetic reference frame

The quantities *X*, *Y*, and *Z* are the sizes of perpendicular vectors that add vectorially to **B**; their directions form a local Cartesian coordinate system. The corresponding set of local spherical polar-coordinate components is denoted by (*F*, *I*, *D*). In both these local coordinate systems, the orientation varies with position on the surface.

The spherical harmonic representation initially produces the Cartesian (*X'*, *Y'*, *Z'*). These are then rotated into the geodetic (*X*, *Y*, *Z*) - see Section 3.2.3. The magnetic elements *H*, *F*, *I* and *D* are then computed from the orthogonal components (*X*, *Y*, *Z*):

$$H = \sqrt{X^2 + Y^2}, \quad F = \sqrt{H^2 + Z^2}, \quad I = \arctan(Z, H), \quad D = \arctan(Y, X) \quad (4)$$

where $\arctan(a, b)$ is $\tan^{-1}(a/b)$, taking into account the angular quadrant, avoiding a division by zero, and resulting in a declination in the range of $-\pi$ to π and inclination of $-\pi/2$ to $\pi/2$. (In equations, and in computing sub-routines, angles are in radians, but typical user software allows input/output in degrees). Conversely, *X*, *Y*, and *Z* can be determined from the quantities *F*, *I*, and *D*.

The time variation (secular variation) of these elements is computed using

$$\begin{aligned}
 \dot{H} &= \frac{X \cdot \dot{X} + Y \cdot \dot{Y}}{H} \\
 \dot{F} &= \frac{X \cdot \dot{X} + Y \cdot \dot{Y} + Z \cdot \dot{Z}}{F} \\
 \dot{I} &= \frac{H \cdot \dot{Z} - Z \cdot \dot{H}}{F^2} \\
 \dot{D} &= \frac{X \cdot \dot{Y} - Y \cdot \dot{X}}{H^2}
 \end{aligned} \tag{5}$$

where \dot{I} and \dot{D} , are given in radians/year. These angular changes are typically converted by user software to arc-minutes/year.

3.3 Transform of magnetic vector components from geocentric to geodetic frame

The geocentric magnetic field vector components X' , Y' and Z' , are rotated into the geodetic reference frame, using

$$\begin{aligned}
 X &= X' \cos(\varphi' - \varphi) - Z' \sin(\varphi' - \varphi) \\
 Y &= Y' \\
 Z &= X' \sin(\varphi' - \varphi) + Z' \cos(\varphi' - \varphi)
 \end{aligned} \tag{6}$$

with corresponding equations for the time derivatives of the vector components, \dot{X}' , \dot{Y}' and \dot{Z}'

$$\begin{aligned}
 \dot{X} &= \dot{X}' \cos(\varphi' - \varphi) - \dot{Z}' \sin(\varphi' - \varphi) \\
 \dot{Y} &= \dot{Y}' \\
 \dot{Z} &= \dot{X}' \sin(\varphi' - \varphi) + \dot{Z}' \cos(\varphi' - \varphi)
 \end{aligned} \tag{7}$$

4 Specification of the geomagnetic reference model

4.1 Potential of the magnetic field

To the accuracy of present models, it is adequate to assume that $\mu = \mu_0$ everywhere. In the absence of local electric currents, the magnetic field \mathbf{B} then behaves as a potential field and can be written as the negative spatial gradient of a scalar potential V , satisfying the Laplace equation $\nabla \cdot \nabla V = 0$. In geocentric spherical coordinates (λ, φ', r) this gives

$$\mathbf{B}(\lambda, \varphi', r, t) = -\nabla V(\lambda, \varphi', r, t) \tag{8}$$

The potential V is the sum of contributions by sources internal and external to the Earth. The internal contributions are due mostly to the geodynamo in the core and magnetization of the lithosphere. The external part accounts for a steady contribution of the magnetospheric ring current, which is present even during magnetically quiet periods. It changes gradually over the course of the 11 year solar cycle and is therefore well represented by the same piece-wise linear temporal representation as the internal field. The potential V is expanded in terms of spherical harmonics:

$$V(\lambda, \varphi', r, t) = a \sum_{n=1}^{N_i} \left(\frac{a}{r} \right)^{n+1} \sum_{m=0}^n ({}_i g_n^m(t) \cos m\lambda + {}_i h_n^m(t) \sin m\lambda) \tilde{P}_n^m(\sin \varphi') \\ + a \sum_{n=1}^{N_e} \left(\frac{r}{a} \right)^n \sum_{m=0}^n ({}_e g_n^m(t) \cos m\lambda + {}_e h_n^m(t) \sin m\lambda) \tilde{P}_n^m(\sin \varphi') \quad (9)$$

where N_i and N_e are the truncation degrees of internal and external expansion, respectively, a (6 371 200 m) is the geomagnetic reference radius, (λ, φ', r) are the longitude, latitude and radius in a spherical geocentric reference frame, and ${}_i g_n^m(t)$ and ${}_i h_n^m(t)$ are the internal and ${}_e g_n^m(t)$ and ${}_e h_n^m(t)$ the external time-dependent Gauss coefficients of degree n and order m . The Schmidt semi-normalized associated Legendre functions $\tilde{P}_n^m(\mu)$, where $\mu = \sin \varphi'$ is a real number in the interval $[-1; 1]$, are defined as

$$\tilde{P}_n^m(\mu) = \sqrt{2 \frac{(n-m)!}{(n+m)!}} P_{n,m}(\mu) \text{ if } m > 0 \\ \tilde{P}_n^m(\mu) = P_{n,m}(\mu) \text{ if } m = 0 \quad (10)$$

This follows the definition of $P_{n,m}(\mu)$ commonly used in geodesy and geomagnetism (e.g., Heiskanen and Moritz, 1967; Langel, 1987). Sample functions, for geocentric latitude, φ' , are:

$$P_{3,0}(\sin \varphi') = \frac{1}{2}(\sin \varphi')(5 \sin^2 \varphi' - 3) \\ P_{3,1}(\sin \varphi') = -\frac{3}{2}(\cos \varphi')(1 - 5 \sin^2 \varphi') \\ P_{3,2}(\sin \varphi') = 15(\sin \varphi')(1 - \sin^2 \varphi') \\ P_{3,3}(\sin \varphi') = 15 \cos^3 \varphi' \quad (11)$$

These $P_{n,m}(\mu)$ are related to the $P_n^m(\mu)$ defined in the NIST Handbook of Mathematical Functions (Section 14.2, page 352) or Gradshteyn and Ryzhik (1994, Chapter 8.7) by $P_{n,m}(\mu) = (-1)^m P_n^m(\mu)$.

4.2 Geomagnetic reference radius

The geomagnetic reference radius used in the spherical harmonic expansion of the magnetic potential is fixed by convention at $a = 6\,371\,200$ m. The Gauss coefficients are referenced to this value. It is therefore important to use exactly this value in the computation of the field elements.

4.3 Epoch of a sub-model

The Gauss coefficients of a geomagnetic reference sub-model are specified in terms of a fixed base-date, t_0 , the so-called epoch of the sub-model. The epoch is given in decimal year; for example as 2010.0.

4.4 Validity of a submodel

Due to non-linear changes of the Earth's magnetic field, linear geomagnetic reference models of the type described here are valid only for a limited period. The start and end dates of a model are given in decimal year. For example, a model validity of 2010.0 to 2015.0 means that the model is valid from 2010-Jan-01 00:00:00 to 2015-Jan-01 00:00:00.

The 'external' coefficients represent fields from a source at some region outside $r=a$. For an observation point further out than the source, the corresponding field is now 'internal'. So there is a limit in radius beyond which the external coefficients are not appropriate. This radius will be specified by the model, along with the maximum degree of the external terms. Magnetic fields caused by electric currents in the magnetosphere are specifically covered by ISO Standard 22009 "Space systems — Space environment (natural and artificial) — Model of the Earth's magnetospheric magnetic field".

4.5 Time-dependence of Gauss coefficients

The Gauss coefficients ${}_i g_n^m(t)$, ${}_i h_n^m(t)$, ${}_e g_n^m(t)$ and ${}_e h_n^m(t)$ are determined for the desired time t from the model coefficients ${}_i g_n^m(t_0)$, ${}_i h_n^m(t_0)$, ${}_e g_n^m(t_0)$ and ${}_e h_n^m(t_0)$, and the linear secular variation model coefficients ${}_i \dot{g}_n^m(t_0)$, ${}_i \dot{h}_n^m(t_0)$, ${}_e \dot{g}_n^m(t_0)$ and ${}_e \dot{h}_n^m(t_0)$, at epoch t_0 as

$$\begin{aligned} {}_i g_n^m(t) &= {}_i g_n^m(t_0) + (t - t_0) {}_i \dot{g}_n^m(t_0) \\ {}_i h_n^m(t) &= {}_i h_n^m(t_0) + (t - t_0) {}_i \dot{h}_n^m(t_0) \\ {}_e g_n^m(t) &= {}_e g_n^m(t_0) + (t - t_0) {}_e \dot{g}_n^m(t_0) \\ {}_e h_n^m(t) &= {}_e h_n^m(t_0) + (t - t_0) {}_e \dot{h}_n^m(t_0) \end{aligned} \quad (12)$$

Here, time is given in decimal years and t_0 is the epoch of the sub-model.

If for a sub-model extending from time t_1 to t_2 the secular variation coefficients are not explicitly provided, then they have to be computed by

$$\begin{aligned} {}_i \dot{g}_n^m(t_1) &= [{}_i g_n^m(t_2) - {}_i g_n^m(t_1)] / (t_2 - t_1) \\ {}_i \dot{h}_n^m(t_1) &= [{}_i h_n^m(t_2) - {}_i h_n^m(t_1)] / (t_2 - t_1) \\ {}_e \dot{g}_n^m(t_1) &= [{}_e g_n^m(t_2) - {}_e g_n^m(t_1)] / (t_2 - t_1) \\ {}_e \dot{h}_n^m(t_1) &= [{}_e h_n^m(t_2) - {}_e h_n^m(t_1)] / (t_2 - t_1) \end{aligned} \quad (13)$$

where the epoch of this particular submodel is t_1 .

In case the degree of the expansion differs between times t_1 and t_2 , then the following applies: If the degree of the expansion is N_1 at t_1 and the degree is N_2 at t_2 , then the secular variation coefficients are computed assuming that ${}_i g_n^m(t_1)$, ${}_i h_n^m(t_1)$, ${}_e g_n^m(t_1)$ and ${}_e h_n^m(t_1)$ are zero for $N_1 < n \leq N_2$. This avoids a discontinuity in the magnetic field at time t_2 . For example, the International Geomagnetic Reference Field changes from degree 10 in 1995 to degree 13 in 2000. When computing the field during the period 1995-2000, the coefficients of degrees 11-13 are linearly interpolated from a value of zero in 1995 to their values in 2000. This procedure was confirmed by the Chair of IAGA Working Group 5, in charge of the IGRF, in an unpublished note of 24-Oct-2011.

4.6 Calculation of magnetic vector components in the geocentric reference frame

The magnetic field vector components X' , Y' and Z' in the geocentric reference frame are computed as

$$\begin{aligned}
X'(\lambda, \varphi', r, t) &= -\frac{1}{r} \frac{\partial V}{\partial \varphi'} \\
&= -\sum_{n=1}^{N_i} \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n ({}_i g_n^m(t) \cos m\lambda + {}_i h_n^m(t) \sin m\lambda) \frac{\partial \check{P}_n^m(\sin \varphi')}{\partial \varphi'} \\
&\quad - \sum_{n=1}^{N_e} \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n ({}_e g_n^m(t) \cos m\lambda + {}_e h_n^m(t) \sin m\lambda) \frac{\partial \check{P}_n^m(\sin \varphi')}{\partial \varphi'}
\end{aligned} \tag{14}$$

$$\begin{aligned}
Y'(\lambda, \varphi', r, t) &= -\frac{1}{r \cos \varphi'} \frac{\partial V}{\partial \lambda} \\
&= \frac{1}{\cos \varphi'} \sum_{n=1}^{N_i} \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n m ({}_i g_n^m(t) \sin m\lambda - {}_i h_n^m(t) \cos m\lambda) \check{P}_n^m(\sin \varphi') \\
&\quad + \frac{1}{\cos \varphi'} \sum_{n=1}^{N_e} \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n m ({}_e g_n^m(t) \sin m\lambda - {}_e h_n^m(t) \cos m\lambda) \check{P}_n^m(\sin \varphi')
\end{aligned} \tag{15}$$

$$\begin{aligned}
Z'(\lambda, \varphi', r, t) &= \frac{\partial V}{\partial r} \\
&= -\sum_{n=1}^{N_i} (n+1) \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n ({}_i g_n^m(t) \cos m\lambda + {}_i h_n^m(t) \sin m\lambda) \check{P}_n^m(\sin \varphi') \\
&\quad + \sum_{n=1}^{N_e} n \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n ({}_e g_n^m(t) \cos m\lambda + {}_e h_n^m(t) \sin m\lambda) \check{P}_n^m(\sin \varphi')
\end{aligned} \tag{16}$$

Correspondingly, the secular variation of the magnetic field components are computed as

$$\begin{aligned}
\dot{X}'(\lambda, \varphi', r, t_0) &= -\frac{1}{r} \frac{\partial \dot{V}}{\partial \varphi'} \\
&= -\sum_{n=1}^{N_i} \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n ({}_i \dot{g}_n^m(t_0) \cos m\lambda + {}_i \dot{h}_n^m(t_0) \sin m\lambda) \frac{\partial \check{P}_n^m(\sin \varphi')}{\partial \varphi'} \\
&\quad - \sum_{n=1}^{N_e} \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n ({}_e \dot{g}_n^m(t_0) \cos m\lambda + {}_e \dot{h}_n^m(t_0) \sin m\lambda) \frac{\partial \check{P}_n^m(\sin \varphi')}{\partial \varphi'}
\end{aligned} \tag{17}$$

$$\begin{aligned}
\dot{Y}'(\lambda, \varphi', r, t_0) &= -\frac{1}{r \cos \varphi'} \frac{\partial \dot{V}}{\partial \lambda} \\
&= \frac{1}{\cos \varphi'} \sum_{n=1}^{N_i} \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n m (\dot{g}_n^m(t_0) \sin m\lambda - \dot{h}_n^m(t_0) \cos m\lambda) \check{P}_n^m(\sin \varphi') \\
&\quad + \frac{1}{\cos \varphi'} \sum_{n=1}^{N_e} \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n m (\dot{g}_n^m(t) \sin m\lambda - \dot{h}_n^m(t) \cos m\lambda) \check{P}_n^m(\sin \varphi')
\end{aligned} \tag{18}$$

$$\begin{aligned}
\dot{Z}'(\lambda, \varphi', r, t_0) &= \frac{\partial \dot{V}}{\partial r} \\
&= -\sum_{n=1}^{N_i} (n+1) \left(\frac{a}{r} \right)^{n+2} \sum_{m=0}^n (\dot{g}_n^m(t_0) \cos m\lambda + \dot{h}_n^m(t_0) \sin m\lambda) \check{P}_n^m(\sin \varphi') \\
&\quad + \sum_{n=1}^{N_e} n \left(\frac{r}{a} \right)^{n-1} \sum_{m=0}^n (\dot{g}_n^m(t) \cos m\lambda + \dot{h}_n^m(t) \sin m\lambda) \check{P}_n^m(\sin \varphi')
\end{aligned} \tag{19}$$

The derivative in equations (14) and (17) may be replaced by the following expression:

$$\frac{d \check{P}_n^m(\sin \varphi')}{d \varphi'} = (n+1)(\tan \varphi') \check{P}_n^m(\sin \varphi') - \sqrt{(n+1)^2 - m^2} (\sec \varphi') \check{P}_{n+1}^m(\sin \varphi') \tag{20}$$

Equations (15) and (18) contain a factor of $\cos \varphi'$ in the denominator. This factor is zero at the poles, but the other functions are such that there is no infinity there. In practice only the $m=1$ terms give a horizontal field near the poles, and this is a nearly uniform field coming from an $n=1, m=1$, potential.

4.7 Spatial wavelength

A model of spherical harmonic degree N accounts for magnetic fields that have spatial wavelengths larger or equal to $360^\circ / \sqrt{N(N+1)}$ in arc length (see Sec. 3.6.3 of Backus *et al.*, 1996).

4.8 Root-mean-square difference between two model fields

It is sometimes useful to assess the difference between two geomagnetic model fields. For example, these could be successive updates of the same model, or two entirely different models. Let $\mathbf{B}_1(\lambda, \varphi', a, t)$ and $\mathbf{B}_2(\lambda, \varphi', a, t)$ be the fields predicted by models 1 and 2, for a particular time t and up to degree N , over the sphere of reference radius a . The mean-square of the difference-vector $(\mathbf{B}_1 - \mathbf{B}_2)$ between the two model fields, is computed following Backus *et al.* (1996, Sec. 4.4.2) as

$$\begin{aligned}
R(t) &= \frac{1}{4\pi} \int_{-\pi/2}^{\pi/2} \int_0^{2\pi} (\mathbf{B}_1(\lambda, \varphi', a, t) - \mathbf{B}_2(\lambda, \varphi', a, t))^2 \cos \varphi' d\lambda d\varphi' = \sum_1^N R_n(t) \\
R_n(t) &= (n+1) \sum_{m=0}^n [(\dot{g}_{1,i}^m(t) - \dot{g}_{2,i}^m(t))^2 + (\dot{h}_{1,i}^m(t) - \dot{h}_{2,i}^m(t))^2] \\
&\quad + n \sum_{m=0}^n [(\dot{g}_{1,e}^m(t) - \dot{g}_{2,e}^m(t))^2 + (\dot{h}_{1,e}^m(t) - \dot{h}_{2,e}^m(t))^2]
\end{aligned} \tag{21}$$

Here, $R(t)$ is the mean-square of the difference-vector between the two model fields; the double integral provides the average over the geomagnetic reference sphere, and $R_n(t)$ is the mean-square of the magnitude of the difference-vector of degree n . Here, the Gauss coefficients $_{1,i}g_n^m(t)$, $_{1,i}h_n^m(t)$, $_{1,e}g_n^m(t)$ and $_{1,e}h_n^m(t)$ of the first model and the coefficients $_{2,i}g_n^m(t)$, $_{2,i}h_n^m(t)$, $_{2,e}g_n^m(t)$ and $_{2,e}h_n^m(t)$ of the second model are assumed zero for n larger than the respective degree of the expansion. The root-mean-square (RMS) difference at time t between the two model fields is then defined as

$$d_{RMS}(t) = \sqrt{R(t)} \quad (22)$$

5 Examples of the use of geomagnetic reference models

5.1 Compute reference magnetic elements near the Earth's surface

Near the Earth's surface it is conventional to express the magnetic field vector in the geodetic frame. To compute such a reference magnetic field for a given location and date typically requires the following steps:

1. Choose the desired date t in decimal years, and the longitude, geodetic latitude and height in metres above the WGS 84 ellipsoid. Heights above mean sea level (approximately following the equipotential surface known as the geoid) need to be converted to height above the ellipsoid. This can be achieved, for example, by using the online geoid calculator for the Earth Gravity Model (EGM) at <http://geographiclib.sourceforge.net/cgi-bin/GeoidEval>, which gives the height of the geoid above the WGS 84 ellipsoid.
2. Convert geodetic to geocentric coordinates (Sec 3.1.3)
3. Compute the Gauss coefficients $_{i}g_n^m(t)$, $_{i}h_n^m(t)$, $_{e}g_n^m(t)$ and $_{e}h_n^m(t)$ for all degrees n and orders m for the desired date t (Sec 3.3.5)
4. Compute magnetic field vector components X' , Y' and Z' in geocentric reference frame (Sec 3.3.6)
5. Since the inclinations of the vertical and northward directions differ between the geocentric and geodetic reference frames, the magnetic field vector components have to be rotated from the geocentric (X' , Y' , Z') to the geodetic (X , Y , Z) (Sec 3.2.3).
6. Compute the magnetic declination and any other desired magnetic elements (Sec 3.2.2) in the geodetic reference frame.

The computed magnetic field elements in the geodetic reference frame are with respect to a local coordinate system where the down axis is perpendicular to the surface of the WGS84 ellipsoid. Deflections of the vertical caused by local gravity anomalies have to be taken care of by the user and are not covered by this standard.

5.2 Compute reference magnetic vector in near-Earth space

In Low Earth Orbit (LEO) it is conventional to express the magnetic field vector in the geocentric frame. To compute such a reference magnetic field vector, e.g. to determine the attitude of a spacecraft, typically requires the following steps:

1. Determine date t in decimal years and position of the spacecraft given in longitude, geocentric latitude and radius
2. Compute the Gauss coefficients $_{i}g_n^m(t)$, $_{i}h_n^m(t)$, $_{e}g_n^m(t)$ and $_{e}h_n^m(t)$ for all degrees n and orders m for the desired date t (Sec 3.3.5)
3. Compute model magnetic field vector components X' , Y' and Z' in geocentric reference frame (Sec 3.3.6), e.g. to compare with measured magnetic field vector to determine attitude of the spacecraft

5.3 Compute reference magnetic vector in magnetosphere

In the magnetosphere it is conventional to express the magnetic field vector in the geocentric frame. To compute such a reference magnetic field vector, e.g. to determine the attitude of a spacecraft, typically requires the following steps:

1. Determine date t in decimal years and position of the spacecraft given in longitude, geocentric latitude and radius
2. Compute the Gauss coefficients ${}_i g_n^m(t)$, ${}_i h_n^m(t)$, for all degrees n and orders m for the desired date t (Sec 3.3.5)
3. The external Gauss coefficients ${}_e g_n^m(t)$ and ${}_e h_n^m(t)$ are not applicable in the magnetosphere because the sources of this magnetic field contribution are not external to the spacecraft location. Instead, a model of the magnetospheric magnetic field should be used, as specified in ISO Standard 22009 "Space systems — Space environment (natural and artificial) — Model of the Earth's magnetospheric magnetic field".
4. Compute model magnetic field vector components X' , Y' and Z' in geocentric reference frame (Sec 3.3.6), e.g. to compare with measured magnetic field vector to determine attitude of the spacecraft

Not Official Standard
For Review Only

Annex (Informative)

Available geomagnetic reference models

1 International Geomagnetic Reference Field

The International Geomagnetic Reference Field (IGRF) was introduced by the International Association of Geomagnetism and Aeronomy (IAGA) in 1968 in response to the demand for a standard spherical harmonic representation of the Earth's main field. The model extends to degree and order 13, and it is updated at 5-yearly intervals, produced and released by IAGA Working Group V-MOD.

1.1 Model web site

<http://www.ngdc.noaa.gov/IAGA/vmod/>

1.2 Stand-alone software

The following public domain software for the IGRF is available for download at the IGRF web site:

Geomag.c: Program in C-language maintained by NOAA's National Geophysical Data Center, distributed both as source code and as precompiled versions for Windows and Linux. It computes the magnetic field vector and elements for given locations (geocentric or geodetic) and dates (or ranges of dates). The program further has command line and spreadsheet options to facilitate repeated processing.

Igrf.f: A FORTRAN program maintained by the British Geological Survey. The IGRF coefficients are embedded into the source code. Options include values at different locations at different times (spot), values at same location at one year intervals (time series), grid of values at one time (grid); geodetic or geocentric coordinates, latitude & longitude entered as decimal degrees or degrees & minutes (not in grid), and choice of main field or secular variation or both (grid only).

1.3 Online calculators

1.3.1 Declination, single point

<http://www.ngdc.noaa.gov/geomag-web/#declination>

<http://www-app3.gfz-potsdam.de/Declinationcalc/declinationcalc.html>

1.3.2 Magnetic vector and elements, single point

<http://www.ngdc.noaa.gov/geomag-web/#igrfwmm>

<http://wdc.kugi.kyoto-u.ac.jp/igrf/point/index.html>

http://www.geomag.bgs.ac.uk/gifs/igrf_form.shtml

1.3.3 Magnetic vector and elements, grids and profiles

<http://www.ngdc.noaa.gov/geomag-web/#igrfgrid>

http://omniweb.gsfc.nasa.gov/vitmo/igrf_vitmo.html

1.4 Charts of the magnetic elements

<http://www.ngdc.noaa.gov/wist/magfield.jsp>

<http://wdc.kugi.kyoto-u.ac.jp/igrf/index.html>

2 World Magnetic Model

The World Magnetic Model (WMM) is the standard model used by the U.S. Department of Defense (DoD), the U.K. Ministry of Defence and the North Atlantic Treaty Organization (NATO), for navigation, attitude and heading referencing systems using the geomagnetic field. It is also used widely in civilian navigation and heading systems. Sponsored by the U.S. National Geospatial-Intelligence Agency (NGA) and the U.K. Defence Geographic Centre (DGC), the WMM is currently produced by the U.S. National Oceanographic and Atmospheric Administration's National Geophysical Data Center (NOAA/NGDC) and the British Geological Survey (BGS). The U.K. and U.S. have been collaborating in the production of the World Magnetic Charts, World Chart Models and World Magnetic Models since 1965.

The WMM is a purely predictive model extending to degree and order 12, produced in 5-year intervals. The updated model is released in December before the new epoch (Dec-2014, Dec-2019, etc.).

2.1 Model web site

<http://www.ngdc.noaa.gov/geomag/WMM/>

<http://www.geomag.bgs.ac.uk/navigation.html>

2.2 Stand-alone software

Website: <http://www.ngdc.noaa.gov/geomag/WMM/soft.shtml>. All programs are maintained by NGDC and are distributed both as source code and pre-compiled versions for Windows and Linux.

wmm_point.c: Computes the magnetic field vector and elements for a given location (geodetic), altitude (above mean sea level or WGS84 ellipsoid) and date.

wmm_file.c: Computes the magnetic field vector for locations listed in the input file and outputs the results in a file suitable for importing to spreadsheet.

wmm_grid.c: Computes the magnetic field vector for a grid or profile of input points specified by the user. The program can print the result either to the screen or to a file.

WMM GUI: Windows-based graphical user interface. It computes the magnetic field elements and their annual change for a given location (geodetic), altitude (above mean sea level or WGS84 ellipsoid) and date. The location can be specified either in UTM coordinates or in geodetic coordinates.

2.3 Online calculators

<http://www.ngdc.noaa.gov/geomag/WMM/calculators.shtml>

This magnetic field calculator, maintained by NGDC, calculates the elements of the geomagnetic field and their annual change with the option to produce profiles and grids.

http://www.geomag.bgs.ac.uk/data_service/models_compass/wmm_calc.html

This magnetic field calculator, maintained by BGS, calculates the elements of the magnetic field and plots the result and location on a Google map.

2.4 Charts and shape files of the magnetic elements

<http://www.ngdc.noaa.gov/geomag/WMM/image.shtml>

Contour maps as PDF in map sheet size are available for each of the magnetic elements (D, I, H, X, Y, Z, F, and GV) and for their secular variation (rate of change) in Mercator and Polar Stereographic projection. This web site further provides the corresponding shape files of the contour lines.

http://www.geomag.bgs.ac.uk/data_service/models_compass/home.html

Contour maps as PDF are available for the magnetic elements (D, I, H, X, Y, Z, and F) and for their secular variation (rate of change) in Mercator and Polar Stereographic projection.

2.5 WMM technical report

A detailed technical report for the current revision of the model is available on the WMM home page.

2.6 User support

The WMM is supported by the geomagnetic model help desk at NGDC (geomag.models@noaa.gov).

3 British Geological Survey Global Geomagnetic Model

The British Geological Survey Global Geomagnetic Model (BGGM) was introduced in the early 1990s in response to demands from the oil industry. Since then the model has been updated annually and is widely used in directional drilling with Measurement-While-Drilling (MWD) magnetic survey tools. Annual updates allow for the inclusion of new data collected since last revision and any developments in the modelling techniques. With annual updates it is also possible to reduce errors arising from predicting the field at some date after the time span of input data.

3.1 Model web site

www.geomag.bgs.ac.uk/bggm.html

3.2 Software

The model and software are available under licence.

3.3 User support

The BGGM is supported by the BGGM help desk at BGS (bggm@bgs.ac.uk).

4 Enhanced Magnetic Model

The Enhanced Magnetic Model (EMM) is a high-degree model introduced in 2010. It extends to degree and order 720, with secular variation coefficients to degree and order 15. Apart from the main field, it accounts for crustal magnetic anomalies down to 56 km wavelength. The EMM is compiled from satellite, marine, aeromagnetic and ground magnetic surveys. This model is developed and maintained by NOAA's National Geophysical Data Center (NGDC) in collaboration with the United States National Geospatial-Intelligence Agency. The model is produced at 5-year intervals. The updated model is released in December before the new epoch (Dec-2014, Dec-2019, etc.).

4.1 Model web site

<http://www.ngdc.noaa.gov/geomag/EMM/index.html>

4.2 Stand-alone software

Computing the magnetic field for a degree-720 model takes about 2500 times as many computations as for a degree-12 model. Therefore, two software options are provided. The traditional spherical harmonic option places high demands on computing power, but low demands on memory. The mesh-based counterpart uses a pre-computed mesh of the EMM and its secular variation, thereby speeding up the calculations. The mesh option places low demands on computing power but requires about 1GB of memory. All programs are distributed both as source code and as precompiled versions for Windows and Linux.

emm_sph_point.c & emm_mesh_point.c: Compute the magnetic field vector and elements for a given location (geodetic), altitude (above mean sea level or WGS84 ellipsoid) and date.

emm_file_point.c & emm_mesh_file.c: Compute the magnetic field vector for locations listed in the input file and outputs the results in a file suitable for importing into a spread sheet program.

emm_grid_point.c & emm_mesh_grid.c: Compute the magnetic field vector for a grid or profile of input points specified by the user. The program can either print the result to the screen or to a file.

4.3 User support

The EMM is supported by the geomagnetic model help desk at NGDC (geomag.models@noaa.gov).

5 High Definition Geomagnetic Model

The High Definition Geomagnetic Model (HDGM) was introduced in 2011 by NOAA's National Geophysical Data Center (NGDC), responding to demand from the directional drilling industry for a high-resolution, annually updated geomagnetic reference model. The model accounts for the main and the crustal field to degree and order 720, resolving magnetic anomalies down to 56 km wavelength. The secular variation of the

internal field extends to degree and order 15. A magnetospheric ring current baseline is included as an external field component with secular variation to degree and order 1. The HDGM is updated every year and includes a representation of the field reaching back in time.

5.1 Model web site

<http://www.ngdc.noaa.gov/geomag/hdgm.shtml>

5.2 Stand-alone software

All programs are distributed both as source code and as precompiled versions for Windows.

HDGM_sph_point.c: Computes the magnetic field vector and elements for a given location (geodetic) , depth (below mean sea level or WGS84 ellipsoid) and date.

HDGM_file.c: Computes the magnetic field vector for locations listed in the input file and outputs the results in a file suitable for importing to spreadsheet.

HDGM Excel Utility: The Excel add-on allows the HDGM to be evaluated from within the spread sheet environment. The program is available only for the Windows operating system.

HDGM GUI: Windows-based graphical user interface that calculates the magnetic elements for a given location, depth and date. The location can be specified either in UTM coordinates or in geodetic coordinates.

5.3 User support

The HDGM is supported by the geomagnetic model help desk at NGDC (geomag.models@noaa.gov).

Glossary of acronyms

BGGM	British Geological Survey Global Geomagnetic Model
BGS	British Geological Survey
EGM	Earth Gravity Model
EMM	Enhanced Magnetic Model
HDGM	High Definition Geomagnetic Model
IAGA	International Association for Geomagnetism and Aeronomy
IGRF	International Geomagnetic Reference Field
LEO	Low Earth Orbit
MWD	Measurement While Drilling
NATO	North Atlantic Treaty Organization
NGA	National Geospatial-Intelligence Agency
NGDC	National Geophysical Data Center
NIST	National Institute of Standards and Technology
NOAA	National Oceanic and Atmospheric Administration
RMS	Root Mean Square
UTM	Universal Transverse Mercator
WGS84	World Geodetic System 1984
WMM	World Magnetic Model

Bibliography

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NIST Handbook of Mathematical Functions (ISBN 978-0-521-14063-8, paperback), on-line at <http://dlmf.nist.gov/14>.

Backus, G., R.L. Parker, and C. Constable, 1996. *Foundations of geomagnetism*. Cambridge University Press.

Gradshteyn, I.S. and I.M. Ryzhik, 1994. *Table of integrals, series and products* (5th ed). Academic Press.

Heiskanen, W. and H. Moritz, 1967. *Physical geodesy*. San Francisco: W.H. Freeman and Company.

ISO 19111, 2007. Geographic information -- Spatial referencing by coordinates

ISO Standard 22009, " Space systems — Space environment (natural and artificial) —Model of the Earth's magnetospheric magnetic field "

Langel, R.A., 1987. The main field. In *Geomagnetism*, edited by J.A. Jacobs, Academic Press, 249-512.

Not Official Standard
For Review Only